



Metal Standalone Keypad Access Control



- Can connect external reader
- Aluminum alloy case, anti-vandal case
- Full programming from the keypad
- 2000 uses, supports Card, PIN, Card + PIN
- Can be used as a standalone keypad
- Backlight keys
- Wiegand 26 output for connecting to a controller
- Wiegand 26 input for connecting with a reader
- Adjustable Door Output time, Alarm time, Door Open time
- Very low power consumption (30mA)
- Fast operating speed, <20ms with 2000 users
- Lock output current short circuit protection
- Easy to install and program
- Built in light dependent resistor (LDR) for anti tamper
- Built in buzzer
- Red, Yellow and Green LEDs display the working status

5602EM
VANDELPROOF

DEALER CHOP:




Metal Standalone Keypad Access Control



- Waterproof IP68
- Can connect external reader
- Aluminum alloy case, anti-vandal case
- Full programming from the keypad
- 2000 uses, supports Card, PIN, Card + PIN
- Can be used as a standalone keypad
- Backlight keys
- Wiegand 26 output for connecting to a controller
- Wiegand 26 input for connecting with a reader
- Adjustable Door Output time, Alarm time, Door Open time
- Very low power consumption (30mA)
- Fast operating speed, <20ms with 2000 users
- Lock output current short circuit protection
- Easy to install and program
- Built in light dependent resistor (LDR) for anti tamper
- Built in buzzer
- Red, Yellow and Green LEDs display the working status

S602EM-W

WATERPROOF

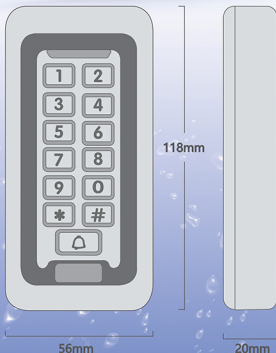

Specifications

Operating Voltage	DC 12V±10%
User Capacity	2000
Card Type	EM,MF
Card Reading Distance	3-6 cm
Active Current	<60mA
Idle Current	25±5mA
Lock Output Load	Max 3A
Alarm Output Load	Max 20A
Operating Temperature	-45 ~ 60 °C
Operating Humidity	10%- 90% RH
Environment	Conforms to IP68
Adjustable Door Relay time	0 -99 seconds
Adjustable Alarm Time	0- 3 minutes
Wiegand Interface	Wiegand 26 bits
Wiring Connections	Electric Lock, Exit Button, External Alarm & Reader
Dimensions	L118 x W56x H20 mm